PRAMAC

ENERGY GENERATION

TG12/3 IP23

PTO SHAFT GENERATORS

Image purely indicative

The TG class generator can produce high quality power for any agricultural use.

Power		
Three phase power COP	kVA	12
Single phase power COP	kVA	6

Specifications		
Voltage	V	400/230
Frequency	Hz	50
Power factor	cos ϕ	08/1
Gear box revolution	rpm	3000
Power (tractor)	kW/HP	22/30
Revolution PTO shaft	rpm	435
Voltage regulation system		Compound
Voltage Accuracy	%	5

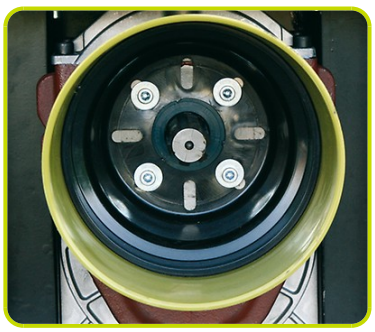

WWW.PRAMAC.COM

Dimensional data		
Length	(L) mm	746
Width	(W) mm	580
Height	(H) mm	958
Dry weight	Kg	110

Equipments	
Thermomagnetic protection	x
Differential protection	x
Voltmeter	x
Frequency meter	x

Sockets	
SCHUKO 230V 16A IP54	1
2P+T CEE 230V 16A IP44	1
3P+N+T CEE 400V 16A IP44	1

Alternator & Socket protection	
Electric protection	IP23
Panel protection	IP44

WWW.PRAMAC.COM

Printed on 29/03/2016 (ID 2323)

©2012 | PR INDUSTRIAL s.r.l. | All rights reserved | Image shown may not reflect actual package. Specifications subject to change without notice | ENERGY GENERATION is registered trademarks of PR INDUSTRIAL s.r.l. Other company, product or service names may be trademarks or service marks of others. RevA (06/2012).

PRAMAC