

TMP32-2



Motor pumps Powermate TMP series is the right answer to handle clean to semi-trash water in all sites. TMP series is conceived to work in tough conditions and guarantee performance despite muddy works sites. Pumps feature limited self-priming. Pump body filling with liquid is not mandatory requirement, although it will help to speed up the working time. Sturdy roll frame for added protection and easy maintenance.

FEATURES

- Powermate OHV engine, 4-Cycle
- Fuel: Petrol
- Starting Systems: Recoil
- Low-oil level shutdown automatically safeguards engine from damage
- Practical quick user's Starting Instruction (decal)
- Pump type: Semi-trash
- Cast Iron Volute and Impeller for durability
- Roll cage for added protection



Main Technical Data

Type	Semi-trash water pump	
Max suction head	m	7
Max Delivery Head	m	29
Delivery Volume	l/min	530
Inlet pipe diameter	inches	2
Outlet pipe diameter	inches	2
Max Solid size	mm	10



Engine

Brand		Powermate
Type		OHV
Operating Speed Nominal	rpm	3600
Fuel		Petrol
Starting Systems		Recoil
Oil capacity	l	0.6
Low Oil Shutdown		√




Autonomy

Fuel tank capacity	l	3.6
Fuel consumption @ 75%	l/h	1.8
Running time @ 75%	h	2.0



Dimensional data

Length	(L) mm	500
Width	(W) mm	435
Height	(H) mm	420
Dry weight	Kg	28
Carton box dimension LxWxH	mm	530x440x445

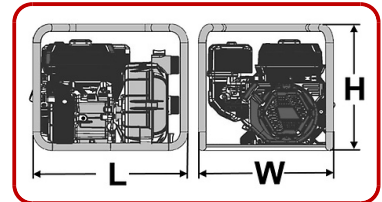

Noise emission

Guaranteed noise level (LWA)	dB(A)	108
Noise level at 7 m	dB(A)	79

General equipment

Strainer	n°	1
Coupling Set	n°	2
Hose band	n°	3
Spark plug tool		√
Oil guard		√



The information is aligned with the Data file at the time of download. Printed on 17/11/2017 (ID 6445)

©2017 | PR INDUSTRIAL s.r.l. | All rights reserved | Image shown may not reflect actual package. Specifications subject to change without notice

Powermate
by PRAMAC